


HANDICAP SIGN DETAIL

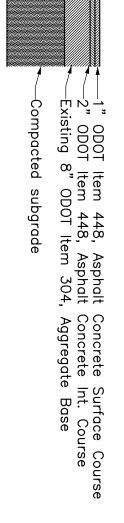

EXPANSION

EXPANSION

VARIABLE LAWN SPACE WIDTH

SIDEWALK 6" RESIDENTIAL 7" COMMERCIAL

STANDARD

CURB

æ

GUTTER


VARIABLE DRIVE WIDTH (MAX. WIDTH 28')

SIDEWALK



RESIDENTIAL COMMERCIAL

EXP. JOINT

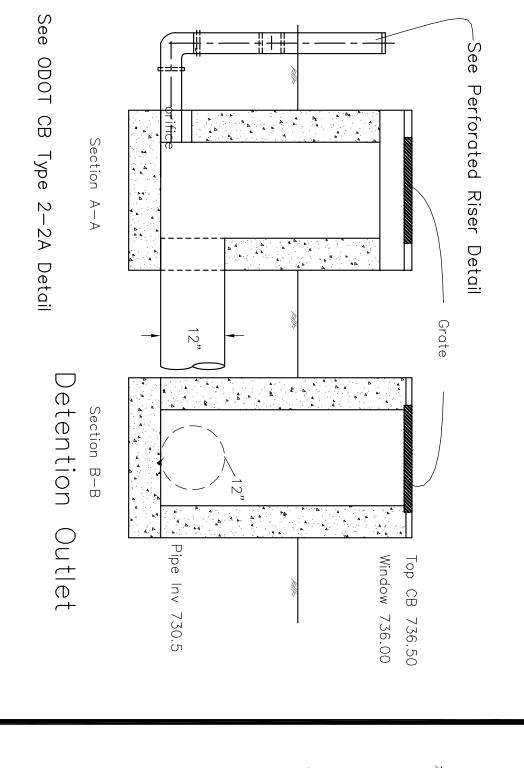

PAVEMENT

DROP CURB DETAILS AT DRIVEWAYS

1/2" 705.03 MATERIAL, USE WITH PORTLAND CEMENT CONCRETE DRIVEWAY

DRIVE APPROACHES SHALL NOT BE POUKED MICHAELY AND TRANSVERSELY.

CURB & GUTTER.

MAXIMUM JOINT SPACING SHALL BE 10' LONGITUDINALLY AND TRANSVERSELY.

COMPACTED GRAVEL MAY BE USED FOR LEVELING COURSE UNDER

CONCRETE DRIVE APPROACH.

WHERE ASPHALTIC CONCRETE PAVEMENT IS DISTURBED, THE ASPHALT SHALL

BE REPLACED AS DIRECTED BY THE ENGINEER.

WHERE SIDEWALK EXISTS PRIOR TO CONSTRUCTION OF DRIVE APPROACH,

THE REPLACEMENT OF THE SIDEWALK IS NECESSARY FOR PROPER DEPTH.

ANY VARIATION FROM THE ABOVE STANDARD MUST BE APPROVED BY

URB AND GUTTER, SIDEWALK, AND DRIVE APPROACH

VINYL EXPANSION MATERIAL AND FIVE OR AASHTO M153-98 SPECIFICATION.

TRANSITION FROM STANDARD CURB SECTION TO DROP TO BE MADE IN 18" DISTANCE FROM DRIVEWAY.

CURB

SECTION

DRIVEWAY

TO LAWN SPACE WIDTH OR

 Ω

Ξ.

(WHICHEVER

 \overline{S}

STANDARD DRIVE APPROACH

CURB |

۳ مح

GUTTER

VARIABLE LAWN SPACE WIDTH

DETENTION OUTLET DETAIL

DRIVEWAY

CHES

General Notes:

1. Forty-eight hours before digging is to commence, the contractor shall notify the following agencies: the Ohio Utility Protection Services (OUPS) and all other agencies which may have underground utilities involving this project and are non-members of Ohio Underground Protection, Inc.

Existing underground utilities and services are shown in their approximate locations according to the best nation available. The locations shown are intended only as a guide and cannot be guaranteed accurate. The actor shall be responsible for:

A. Contacting the individual utility owners ten days prior to construction and advising them of the work to take place.

B. Soliciting their aid with locating and protecting any utility which may interfere with construction.

C. Excavating and verifying the horizontal and vertical location of each utility prior to construction and informing the engineer of any possible conflicts.

D. All damage to any existing utility.

ble filter material on upslope of stakes and extend it into rench. When joints are necesoverlap material between two and fasten securely.

 Contractor shall obtain regulations. All plans and construction shall be in accordance with the current "Rules and Regulations" of the Village of uth Lebanon, Warren County and applicable Ohio Department of Transportation Standards. a permit for all construction activities in accordance with local, state, and federal

The contractor is to penination System (NPDES) rform all inspections as required by the Ohio EPA for the National Pollution Discharge permit and furnish owner's representative with written reports. Owner shall retain

SILT FENCE

 All street surfaces, driven as a result of construction shat specifically noted in the plans. 6. Item numbers refer to the Ohio Department of Transportation Construction and Material Specifications, and all construction work shall be done in accordance with applicable standards of the Village of South Lebanon. When in conflict the city requirements shall prevail. eways, sidewalks, and other structures that are disturbed or damaged in any manner all be replaced in accordance with the specifications at the cost of the contractor if not

8. Where proposed pavement is to match existing pavement, saw cut cracked or damaged existing pavement in neat, straight lines to create a clean butt joint and remove damaged pavement. Coat edge of existing asphalt pavement with asphalt prior to placing proposed asphalt.

CAMPBELL 53249 ~

Safety requirements outl proced and the contractor shammission of Ohio.

10. The contractor shall at pavement surface. Contractor to remove to the end of each work day remove and/or sweep any mud or debris from the road ees and clear areas as necessary to perform all site

All fill under pavement

Adjust all existing cas: ings within project area to grade as required

14. The contractor shall take all appropriate measures to control soil erosion and sedimentation through the life of the contract as required by the Village of South Lebanon, Warren County and the Ohio EPA. This may be performed by the use of mulches, filter fabrics and other devices and methods. Particular care shall be taken to avoid erosion and sedimentation on existing paved and graveled areas and into the sewer system. All ground surface areas that have been exposed or left bare as a result of construction and are to final and are to remain so shall be seeded and mulched as soon as practical in accordance with the State of Ohio fications Item 659.

16. All proposed storm sewer, surface or other drainage facilities are to be private and maintained by the owner, except as located in public right-of-way.

WYCO

CONSULTING,

NC C

Franklin, Ohio 45005 937-743-9926

10 Stadia Drive

wycoconsulting.com

Date

17. All storm structures are ODOT type unless otherwise noted.

Distances shown for sto al field cut length. Connections to existing sanitary sewer and to on Public Works Department.


An 18" vertical clearan ce is to be maintair

All sta าdard parking sp ces are 9' by 18'

20.

Parking lot striping shall be 4" wide white highway-type striping applied in accor

22.

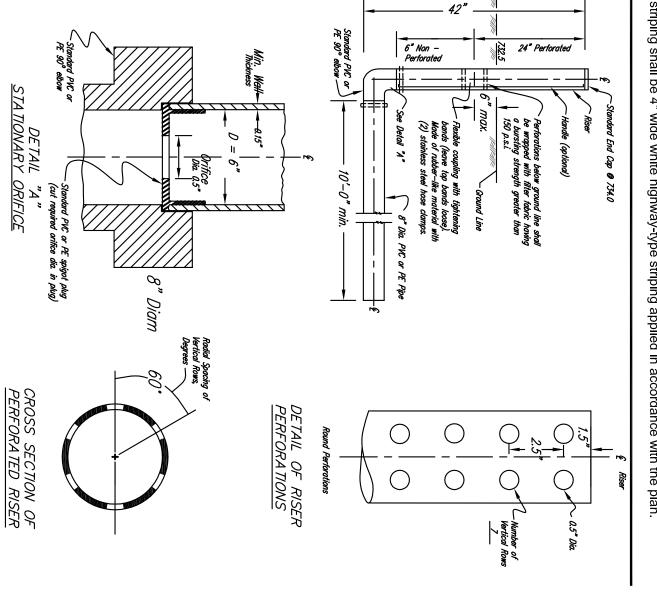

5.6740 Acres Warren County, Ohio S-32, T-5, R-3 3733 Snook Road Fellowship SiteSouth Lebanon S-32, PlanMarch 26, 2015

Rev: HORIZ. SCALE: 1"=40" **VERT. SCALE:** DATE: N N 8/25/2015 3/24/2015

DESIGNED BY: Proposed Site Fellowship Site Plan PROJECT NO.: 1809 RC

PERFORATED RISER DETAIL